



JIZHUANG

冀壮科技

BORDER DEFENSE CATALOGUE



Purchas Manager
Alex Jia



Purchas Manager
Alex Jia



After Sales

Hebei Jizhuang Technology Co., Ltd.




Hebei Jizhuang Technology Co., Ltd has become a professional razor wire manufacturer and exporter since its foundation in 2005.

From the very start, we firmly believe that great product quality is the only way to success. We sincerely cooperate with partners worldwide and produce high quality razor wire products to cater to market demands.

Our products include straight razor wires, single coil razor wires, cross razor wires, welded razor meshes, razor wire mobile security barriers, etc.

We remain committed to innovation, staying active and maintaining the driving force for development as we seek to become the global leader in the industry of border enhanced security razor wire products.

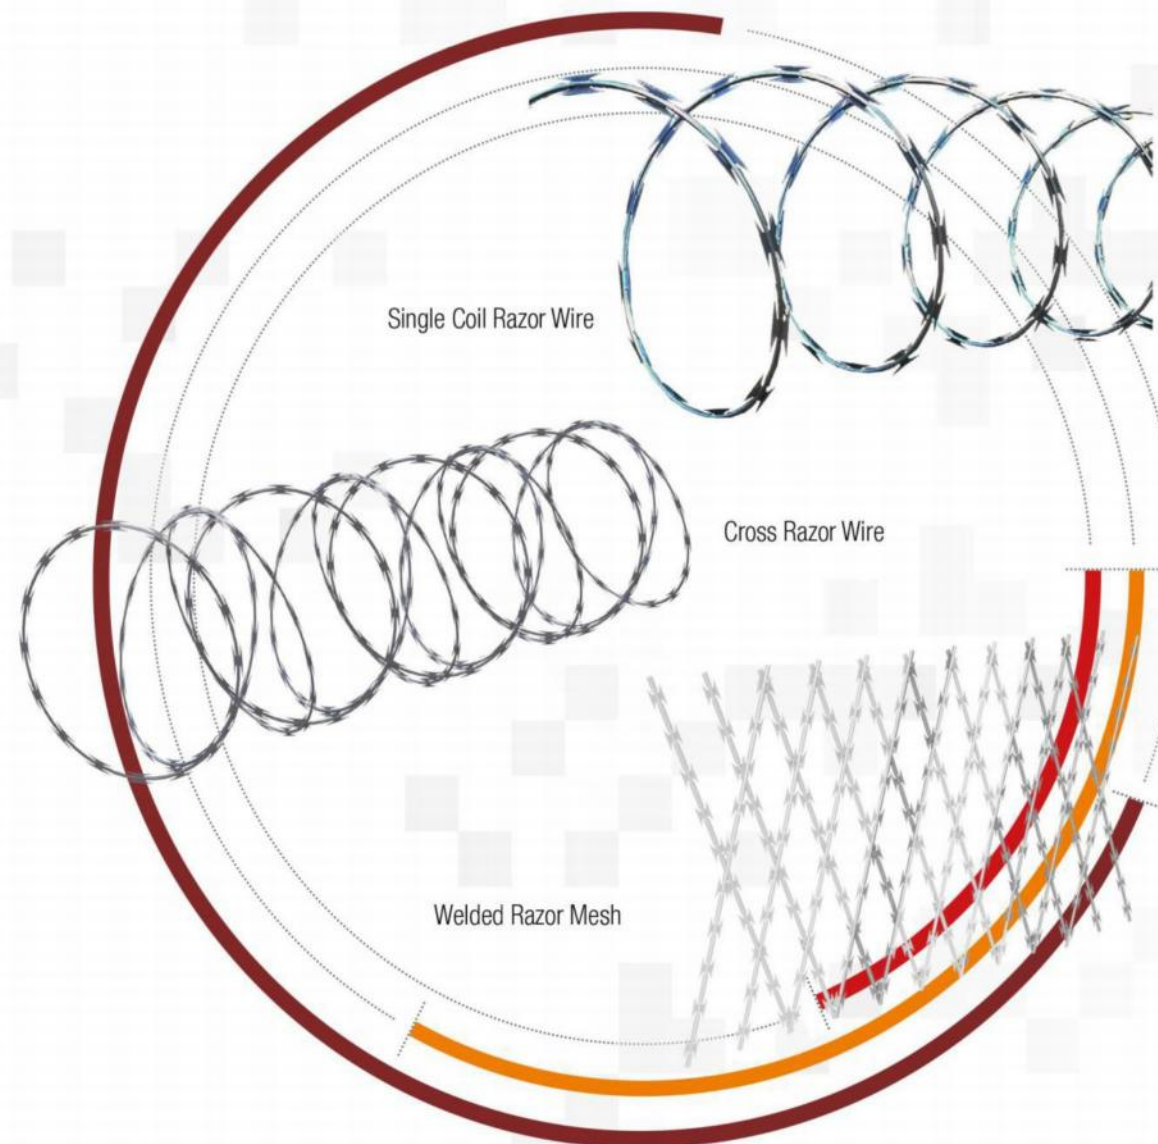

Why Choose Us ?

Real Factory Guarantee

- 20 years dedicated to razor wire production;
- Strong R&D team tailor-made exclusive solutions;
- Complete sets of production lines range from incoming raw materials to outgoing finished products to ensure product quality.

High Quality Raw Material Guarantee

- Zinc contents of raw material steel sheets for razor blades ranges from 60 g/m² to 270 g/m² for your option;
- Only when the roundness and tensile strength of coil wires are proved to be qualified, they are allowed to enter into the next production step.

On-Time Delivery Guarantee

- Razor wire of standard sizes and materials comes in large stocks and can be delivered to our customers as soon as possible;
- Multiple advanced production lines have the full capacity to produce urgent orders and ensure timely delivery.

Service Advantage Guarantee

- Provide professional pre-sales consulting services;
- Professional one-to-one order tracing services to ensure the timely communication in the process of customization and production;
- Considerate after-sales services help you solve technical problem you encounter in the process of installation and use.

Price Advantage Guarantee

- We are a strategic partner of renowned raw material suppliers;
- Customized razor wires are acceptable according to application requirements;
- Factory direct delivery, competitive price.


Originality & Quality Assurance

- Rich experienced senior engineers;
- All outgoing products come with test reports and certificate of
- Cooperate with dozens of razor wire distributors, large scale park construction units, railway construction bureaus, border security engineering contractors, etc.
- We have passed ISO 9001 Quality Management System certification.




TABLE OF CONTENT

P.07	About Razor Wire
P.14	Straight Razor Wire
P.16	Single Coil Razor Wire
P.18	Cross Razor Wire
P.20	Long Blade Concertina Wire
P.22	Fish-Hook Blade Concertina Wire
P.24	BTC Barbed Tape Concertina
P.26	BTC NATO-22 Barbed Tape
P.28	welded Razor Mesh
P.30	Flat Wrap Razor Wire
P.32	Razor Wire Mobile Security Barrier

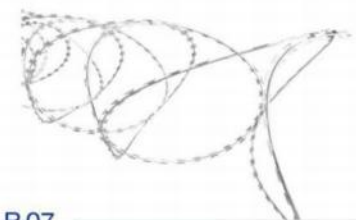

P.07
ABOUT RAZOR WIRE

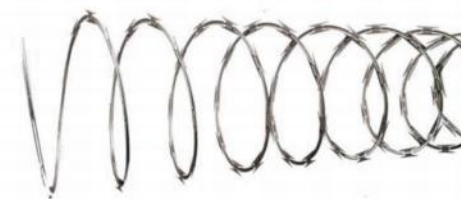


P.20
MAXIMUM SECURITY
Long Blade Concertina Wire
Fish-Hook Blade Concertina Wire



P.24
MILITARY/BORDER SECURITY
BTC Barbed Tape Concertina
BTC NATO-22 Barbed Tape



P.14
MINIMUM TO MEDIUM SECURITY
Straight Razor Wire
Single Coil Razor Wire
Cross Razor Wire



P.28
ENHANCED SECURITY
Welded Razor Mesh
Flat Wrap Razor Wire



P.32
RAZOR WIRE
MOBILE SECURITY BARRIER



TABLE OF CONTENT

P.35 _____
Defensive Barriers

P.36 _____
Main Structures

P.38 _____
Standardized & Skilled production

P.39 _____
Assembly Guidance

P.40 _____
Applications

P.41 _____
Projects Reference List

P.43 _____
Razor Wire Trailer

P.44 _____
Barbed Wire

P.45 _____
Border Boundary Fence

P.46 _____
Temporary Protective Fencing

P.47 _____
Anti-Tank Wire Mesh

P.48 _____
Anti Drone Net



P.35 _____
Defensive Barriers



P.44 _____
Barbed Wire



P.47 _____
Anti-Tank Wire Mesh



P.43 _____
Razor Wire Trailer




P.45 _____
Border Boundary Fence



P.48 _____
Anti Drone Net




SATISFY A WIDE RANGE OF SECURITY PROTECTION DEMANDS.

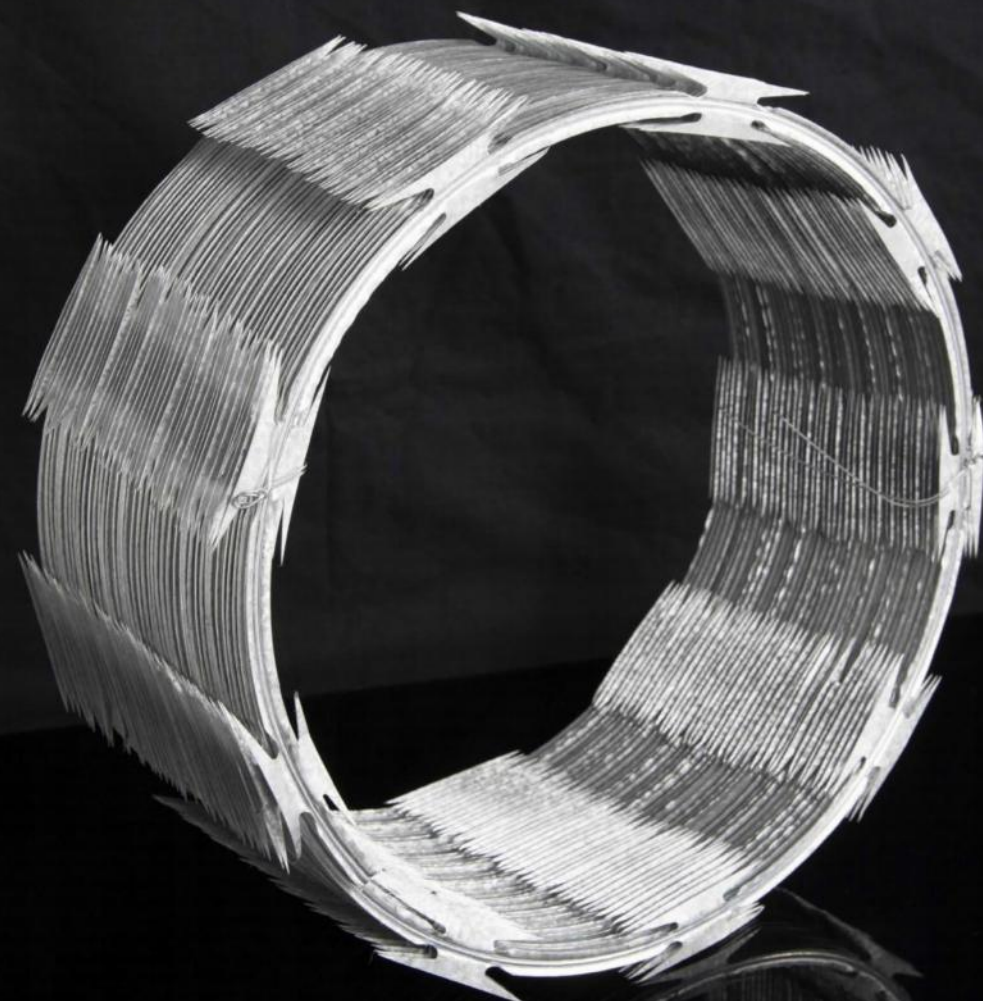

About Razor Wire

Razor wire, also known as barbed tape, is a central strand of high tensile core wire and a punched steel tape with sharp barbs at close intervals uniformly. The razor tape is cold crimped tightly onto the spring steel core, and finally into rolls for easy transport and deployment. For long lasting protection in various high security applications, core wires are generally made of galvanized steel or stainless steel wires while blades are typically made of galvanized steel, stainless steel or aluminized zinc steel sheets.

Characterized by easy installation, razor wire offers both a visual deterrence and a physical barrier that is hard to climb over, thereby effectively keeping out illegal intruders. Razor wire applies to a wide range of applications to meet different security grade requirements. As the raw material varies, it enjoys a service life ranging from 10 to 50 years.

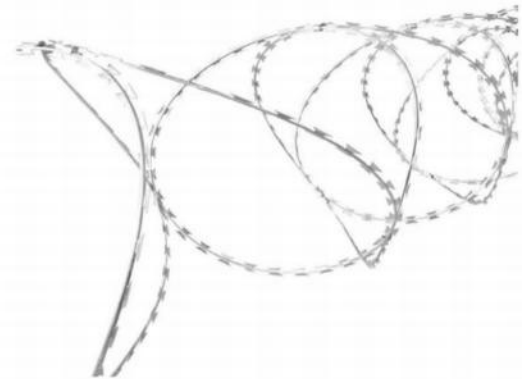

Benefits

- Compared with traditional wire mesh, it offers better security protection.
- As a new type of economic perimeter security barrier, it is an ideal choice for keeping out illegal intruders.
- Various blade types and installation options provide sufficient deterrence and anti-climbing performance to satisfy customer demands at different security levels.
- Wear resistance, corrosion resistance and a long lifespan.
- Generally, it is installed on walls or at the top of fences. In addition, it also works as a stand alone fence.
- Easy and fast installation, low maintenance costs.

Material

To maximize the service life of razor wire and enhance its usability, core wires are generally made of galvanized steel or stainless steel wires, and blades are made of galvanized steel, stainless steel or aluminized zinc steel sheets to prevent blades from rusting and blunt.

Razor wire commonly comes from the following material combinations, you may choose corresponding material combinations according to your applications.

Most economical		Medium durable	
			
Blade: galvanized steel sheet Core wire: galvanized steel wire		Blade: stainless steel sheet Core wire: galvanized steel wire	Blade: stainless steel sheet Core wire: stainless steel wire
Most durable		Colorful	
			
Blade: aluminized zinc steel sheet Core wire: galvanized steel wire	Blade: aluminized zinc steel sheet Core wire: stainless steel wire	Blade: powder coated steel sheet Core wire: powder coated steel wire	

Production Process

• Galvanized Steel/Stainless Steel/Aluminized Zinc Steel Razor Wire



• Powder Coated Razor Wire



Quality Control




Blade Type

Barbed tape can be divided into two main blade series: concertina barbed tape (CBT) and barbed tape obstacle (BTO). There are 5 main popular blade types including fish hook blade, tear blade, long blade, medium blade and short blade.

• Fish-Hook Blade (CBT-60)


Fish-hook blade is the metal in the middle that has gone through the most gyrations. All hooks have an eye to tie your line to, a sharp tip to pierce the fish's mouth and a barb to hold it in place. Although there are a wide variety of innovations in point design, it's the shank & the bend that have changed the most.

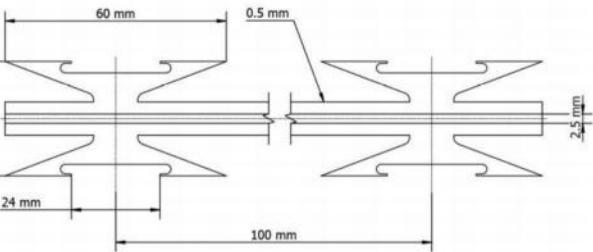

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
CBT-60	0.5±0.05	60.0±2	31±1	100±2	2.5±0.1

• Long Blade (CBT-65)


Razor wire long blade is a vicious product when manufactured of toughened stainless steel blade material. It is usually used for prison fencing. Extra long blade razors provide maximum frightening effect.

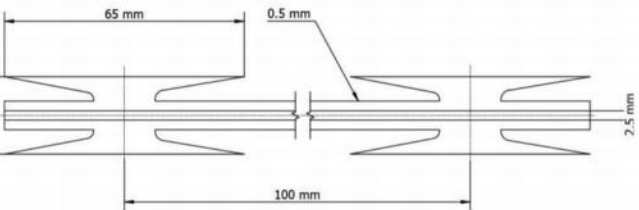

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
CBT-65	0.5±0.05	65.0±2	51±1	100±2	2.5±0.1

• Tear Blade (BTO-30)


Tear blade is an hybrid of medium blade and long blade, more vicious than a medium blade and more economical than long blade.

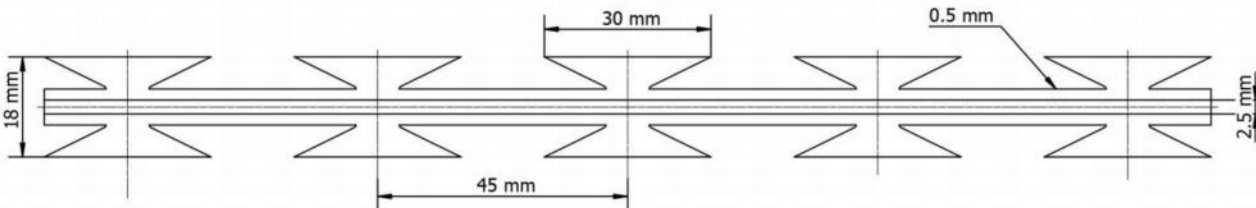

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-30	0.5±0.05	30.0±1	18±1	45±2	2.5±0.1

• Medium blade (BTO-22)


Concertina wire medium blade is an improvement on the short blade variety at a cost-effective price level. It is widely used for commercial and industrial applications. Medium blade concertina wire had a much sharper edge and quickly gained the reputation of being an extremely effective low cost security choice.

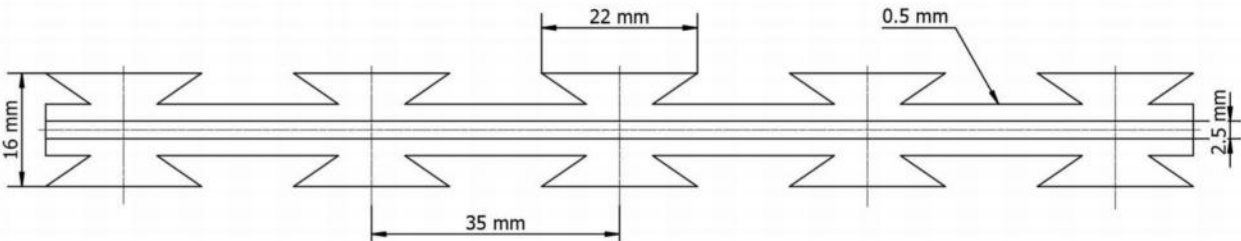

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-22	0.5±0.05	22±1	16±1	35±2	2.5±0.1

• Short Blade (BTO-10)


Short blade is the original profile of razor wire barbed tape, which is developed for military applications. Although mostly replaced by medium blade, it is still preferred by some organizations. It is the most economical type among all the barbed tapes.

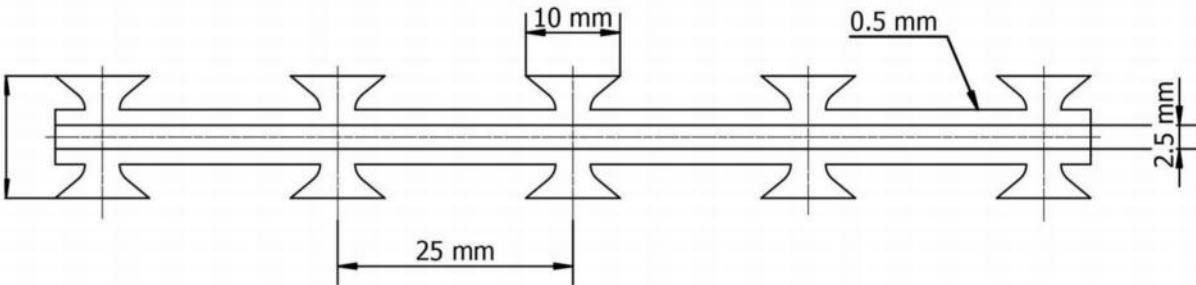

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-10	0.5±0.05	10.0±2	13±1	25±2	2.5±0.1


Other blade types available

• BTO-12

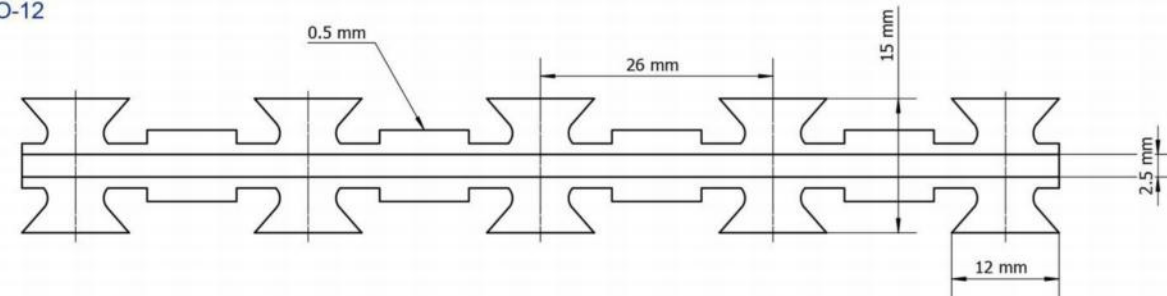


Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-12	0.5±0.05	12.0±2	15±1	33±1	2.5±0.1

• BTO-18

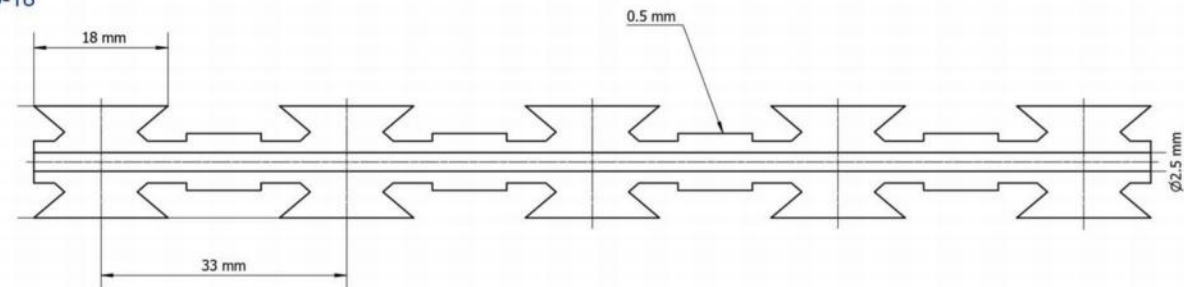


Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-18	0.5±0.05	18.0±2	15±1	33±2	2.5±0.1

• BTO-28

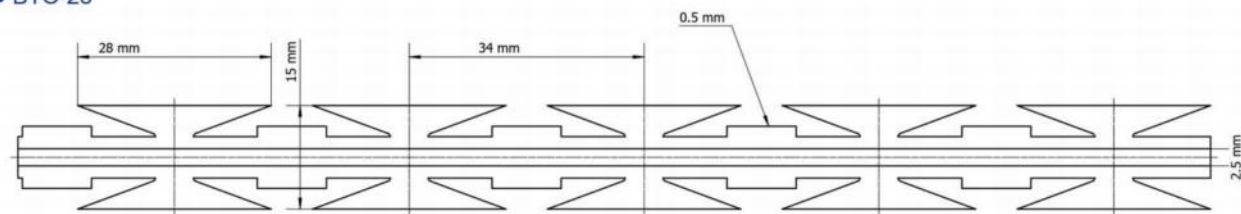

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-28	0.5±0.05	28.0±2	15±1	45±2	2.5±0.1

Our Products

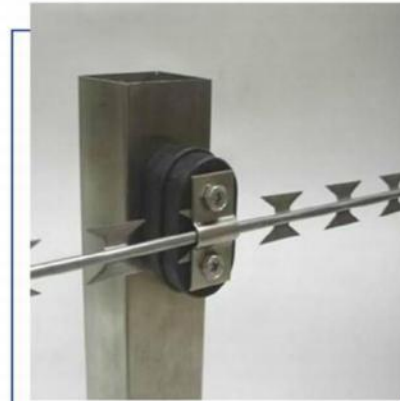

Straight razor wire



Single coil razor wire



Cross razor wire



Welded razor mesh



Flat wrap razor wire



Razor wire mobile security barrier

Application

Razor wire is a new type of protective fence featuring attractive appearance, practical functions, excellent deterrence effect and easy construction. It is widely used in apartments, garden protection, factories, enterprises, border posts, government buildings, military bases, detention houses and institutions and facilities with high temporary security protection demands.





MINIMUM TO MEDIUM SECURITY

STRAIGHT Straight Razor Wire

Straight razor wire, similar to barbed wire, is a new type of blade type barbed wire placed in straight lines for easy and quick installation. Razor blades are made of hot dip galvanized steel sheets or stainless steel sheets by stamping, cutting and other processing procedures. Core wires are made of high tensile galvanized steel wires or stainless steel wires.

Its sharp blades deliver not only physical intimidation but also visual deterrent, aesthetically pleasing yet frightening, thereby effectively protecting site perimeters and preventing unauthorized access.

It is commonly installed on the wall or at the top of fences and is widely used in site perimeters, all kinds of traffic facilities for isolation and protection and other places require low level security protection.

Benefits

- Straight line type for easy, quick installation and little additional maintenance.
- Sharp blades offer great intimidation effect.
- High quality galvanized steel and stainless steel are employed for great corrosion resistance.
- Offer economic perimeter protection, and prevent unauthorized access.
- Install on existing fences, brick walls or wood walls.

Application

Straight razor wire is a perfect choice for installing on walls or at the top of fences to prevent unauthorized access and is widely used in residential communities, farms, gardens, parks, construction sites, workshops and other places require low level security protection.




For park protection



For farm protection



For residential community protection

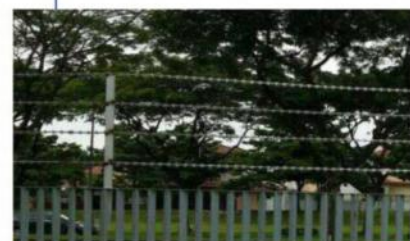


For road perimeter protection




Packing

Available in moisture-proof paper + woven bag or carton packing.


Specification

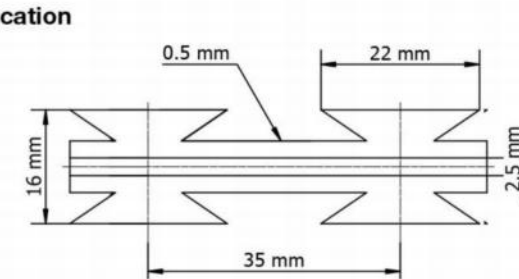


Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-10	0.5±0.05	10±1	13±1	25±1	2.5±0.1

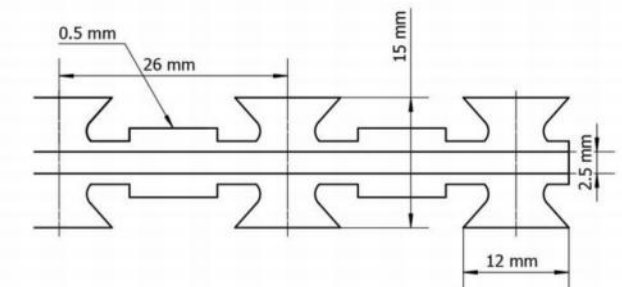


Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-12	0.5±0.05	12.0±2	15±1	33±1	2.5±0.1

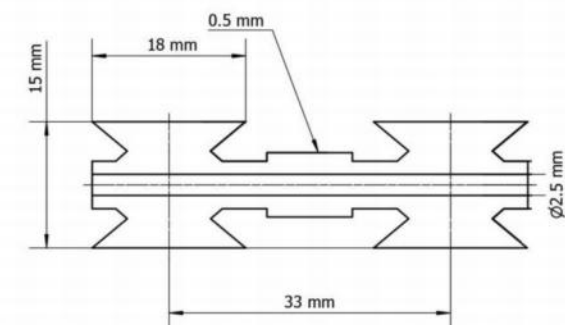


Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-18	0.5±0.05	18±1	15±1	33±1	2.5±0.1

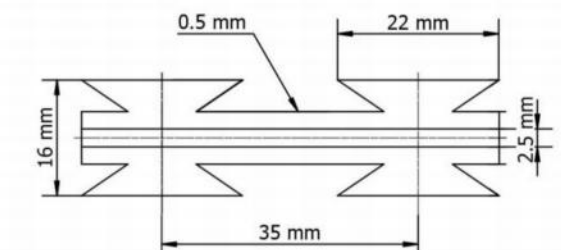

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-22	0.5±0.05	22±1	16±1	35±1	2.5±0.1

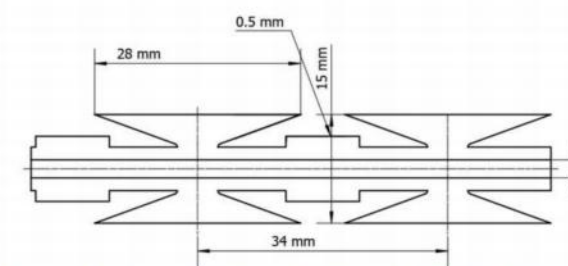

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-28	0.5±0.05	28±1	15±1	45±1	2.5±0.1

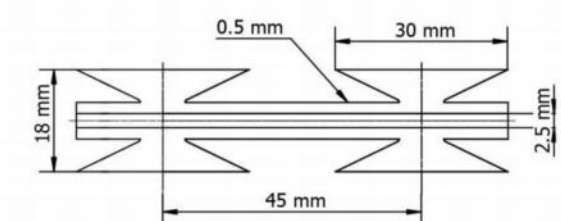

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-30	0.5±0.05	30±1	18±1	45±1	2.5±0.1

- Core wire material: galvanized steel wires or stainless steel wires.
- Blade material: galvanized steel sheets or stainless steel sheets.
- Other materials and sizes can be customized upon request.



SINGLE COIL


Single Coil Razor Wire

Single coil razor wire is supplied without clips, and can be unfolded and folded quickly like a spring on the wall or fences. In addition, its long blade spiral design makes climbing and touching extremely difficult, thereby offering excellent enhanced security protection.

During the installation, you may adjust the spacing between loops according to the actual length of the wall or the fence. Single coil razor wires are widely used in private lands, commercial properties, construction sites and other places requiring a low-level security protection to enhance perimeter protection and prevent illegal entry.

Benefits

- Sharp long blades and high tensile core wire offer great anti-cut and anti-shear performance.
- High quality galvanized steel and stainless steel are employed for great weather resistance and corrosion resistance.
- Sharp, solid blades make it hard to access to and offer great protection performance.
- Low cost and easy installation. It can be installed easily by stretching the razor wire roll and adjust the length and loop spacing according to your security demands.

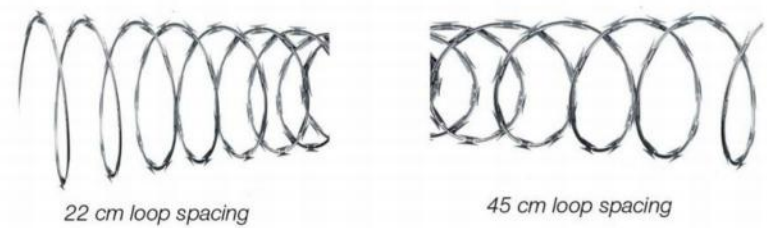

Application

Single coil razor wires are widely used in apartment, private lands, commercial properties, construction sites, factories, road restricted areas, forest reserve and other places requiring security protection.



For road restricted area protection



For factory isolation & protection



For private land protection



For commercial property protection

Packing

Packed in cartons or bound to a wood pallet with steel straps.




Carton package




Wood pallet package

Specification of Single Coil Razor Wire

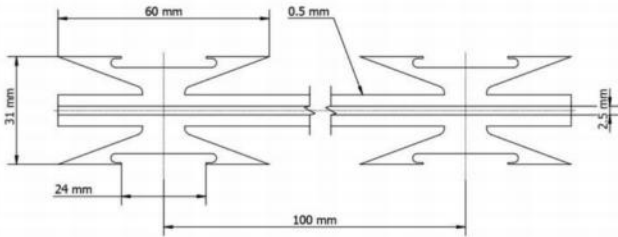

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
CBT-60	0.5±0.05	22±1	16±1	35±2	2.5±0.1

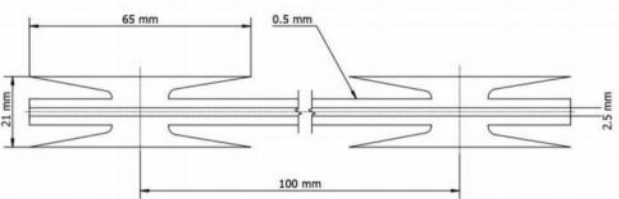

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
CBT-65	0.5±0.05	65±2	21±1	100±2	2.5±0.1

- Core wire material: galvanized steel wires or stainless steel wires.
- Blade material: galvanized steel sheets or stainless steel sheets.
- Other materials and sizes can be customized upon request.

Specification of Single Coil Razor Wire Rolls

Outer Diameter (mm)	Coil Loops (mm)	Loop Spacing (mm)	Extended Length (m)	Blade Type
300	33	450	15	CBT-60, CBT-65
450	33	450	15	CBT-60, CBT-65
600	33	450	15	CBT-60, CBT-65
750	33	450	15	CBT-60, CBT-65
900	33	450	15	CBT-60, CBT-65



Cross Razor Wire

Cross razor wires are generally equipped with short or medium blades. Two adjacent razor wire coils are crossed and clamped together with clips made of stainless steel or galvanized steel sheets to form cross razor wires. Stretching the cross razor wire roll, it expands like a concertina, therefore, it is also called as concertina cross razor wire.

After installation, blades are orderly arranged at regular intervals and the spacing between loops is smaller than that of single coil razor wires, thereby offering better security protection.

Cross razor wires are widely used in rural areas for crop protection, apartments, schools, factories, parking lots, warehouses and other places requiring a medium level security protection.

Benefits

- High quality galvanized steel, stainless steel or aluminized zinc steel sheets are adopted to offer great resistant to corrosion, aging and weathering.
- Easy installation, operation and simple construction.
- Cross razor wires are firmly installed to offer excellent anti-cut and anti-climb performances.
- It offers both an attractive appearance and a great deterrent effect after installation.

Application

Cross razor wires are widely used in rural areas for crop protection, apartments, schools, factories, parking lots, warehouses and other places requiring a medium level security protection.

Packing

Inner waterproof paper + outer woven bag, carton or customized upon request.



Waterproof paper + woven bag package



Carton package



For school perimeter protection



For expressway protection




For factory property protection




For rural area crop protection




Specification of Cross Razor Wires

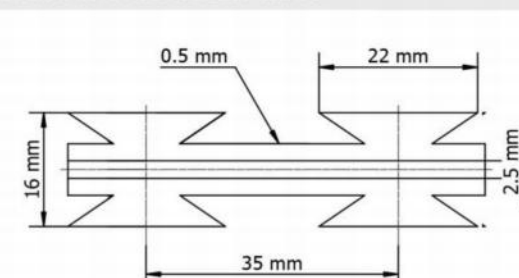


Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-10	0.5±0.05	10±1	13±1	25±1	2.5±0.1

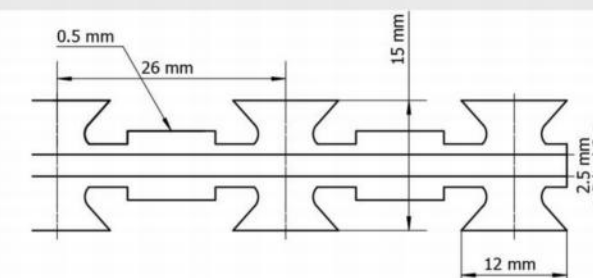


Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-12	0.5±0.05	12.0±2	15±1	33±1	2.5±0.1

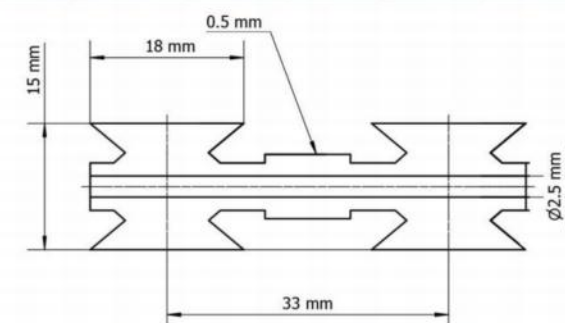


Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-18	0.5±0.05	18±1	15±1	33±1	2.5±0.1

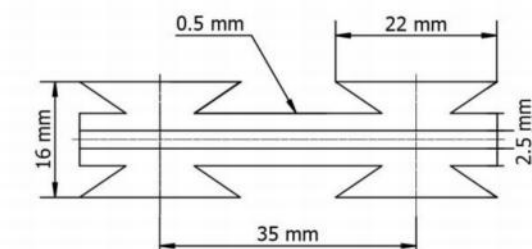

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-22	0.5±0.05	22±1	16±1	35±1	2.5±0.1

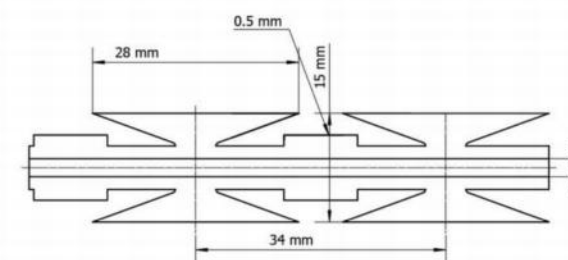

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-28	0.5±0.05	28±1	15±1	45±1	2.5±0.1

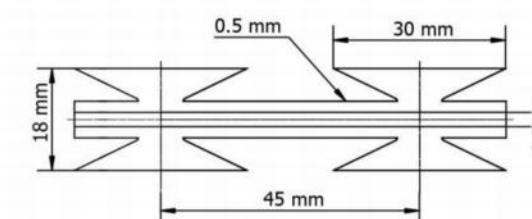

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-30	0.5±0.05	30±1	18±1	45±1	2.5±0.1

- Core wire material: galvanized steel wires or stainless steel wires.
- Blade material: galvanized steel sheets or stainless steel sheets.
- Other materials and sizes can be customized upon request.

Specification of Cross Razor Wire Rolls

Outer Diameter (mm)	Coil Loops	Clips	Loop Spacing (mm)	Extended Length (m)	Blade Type
450	31	3	300	4.5	BTO-10, BTO-12, BTO-18, BTO-22, BTO-28, BTO-30
600	31	3	400	6	BTO-10, BTO-12, BTO-18, BTO-22, BTO-28, BTO-30
750	31	3	400	6	BTO-10, BTO-12, BTO-18, BTO-22, BTO-28, BTO-30
900	31	3	400	6	BTO-10, BTO-12, BTO-18, BTO-22, BTO-28, BTO-30





MAXIMUM SECURITY

LONG BLADE

Long Blade Concertina Wire

Featured by high density, long blade razor wire is specially designed for maximum security applications. After installation, the spacing between loops are so small that people cannot climb over, thereby keeping out illegal intruders.

Compared with cross razor wire, long blade concertina wire uses more clips to connect adjacent loops and has longer, sharper blades, offering a better psychological deterrent effect.

It applies to all types of outdoor applications and is your ideal choice for protecting your private properties and even for protecting military sites, prisons and government agencies.

Benefits

- 2.5 mm steel wires are used as core wires to offer great anti-shear performance.
- It can be installed on concrete walls, special brackets and fences.
- Easy to install and remove, and can be reused.
- Hot dip galvanized steel or stainless steel, aluminized zinc steel sheets are adopted to deliver great resistant to corrosion and weathering.
- Depending on raw materials used, it enjoys a service life ranging from 10 to 50 years.
- It offers an economic yet effective solutions against illegal intrusion.

Application

Long blade concertina wires are widely used in military bases, prisons, airports, substations, ports, photovoltaic power stations, parking lots and other places requiring a high level of security protection.



For military defense



For prison security protection



For factory security protection



For railway perimeter protection



Packing

Inner waterproof paper + outer woven bag, carton or customized upon request.




Waterproof paper + woven bag



Carton package

Specification of Long Blade Concertina Wire

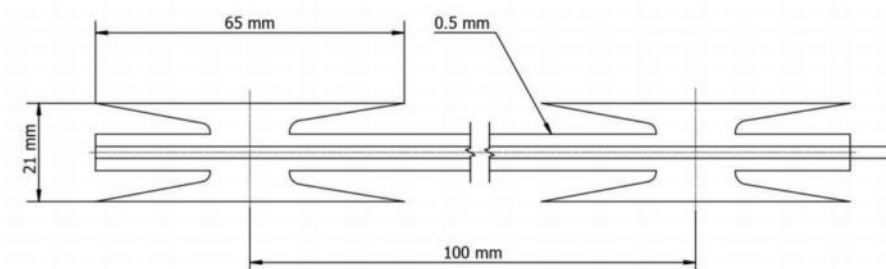

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
CBT-65	0.5±0.05	65±2	21±1	100±2	2.5±0.1

- Core wire material: galvanized steel wires or stainless steel wires.
- Blade material: galvanized steel sheets or stainless steel sheets.
- Other materials and sizes can be customized upon request.

Specification of Long Blade Concertina Wire Rolls

Outer Diameter (mm)	Coil Loops	Clips	Loop Spacing (mm)	Extended Length (m)	Blade Type
750	51 (81)	5	300	7.5 (12)	CBT-65
900	51 (81)	5	300	7.5 (12)	CBT-65
1000	51 (81)	5	300	7.5 (12)	CBT-65
1000	51 (81)	7	300	7.5 (12)	CBT-65
1500	51 (101)	9	300	7.5 (15)	CBT-65





FISH-HOOK BLADE

Fish-Hook Blade Concertina Wire

Fish-hook blade is the metal in the middle that has gone through the most gyrations. All hooks have an eye to tie your line to, a sharp tip to pierce the fish's mouth and a barb to hold it in place. Although there are a wide variety of innovations in point design, it's the shank & the bend that have changed the most.

Designed with 8 needle-sharp barbs, fish-hook blade concertina wire is recommended and specified worldwide as a premium physical perimeter barrier that provides unparalleled physical protection and psychological deterrence. Fish-hook blade concertina wires are widely used in places where the highest level security protection is required, for example, prisons and major projects.

Benefits

- Compact, reasonable arranged structure, high security coefficient.
- Greater psychological deterrence.
- Depending on raw materials used, it enjoys a service life ranging from 10 to 50 years.
- Easy to install and remove, and can be reused.
- It requires no additional maintenance or configuration and offers an all-weather security protection.
- Great adaptability and can be installed on different types of surfaces, such as concrete wall, metal fence or ground.
- In addition to standard sizes, other materials and sizes can be customized upon request..

Application

Fish-hook blade concertina wire commonly works with field fences, welded fence, wall and gates to provide improved security protection. It is widely used in prison, detention houses, nuclear power plants, petroleum & chemical storage, refineries, nuclear weapon storage and other places where the highest level security protection is required.



For prison perimeter security



For factory protection



For detention house protection



For power plant protection

Packing & Shipping

Fish-hook blade concertina wire coils are commonly packed with moisture-proof paper inside and woven bag outside to ensure the safety and integrity of the products during transportation.

Generally, they are transported in 2 ways.

- Fish-hook blade concertina wire coils are stacked up, compacted the goods with a baling press and then fixed with steel strips to make good use of the space in the container.
- Fish-hook blade concertina wire coils are packed in rolls and neatly placed in wood pallets for easy loading and unloading by forklift.




Steel strip package



Wood pallet package

Specification of Fish-Hook Blade Concertina Wire

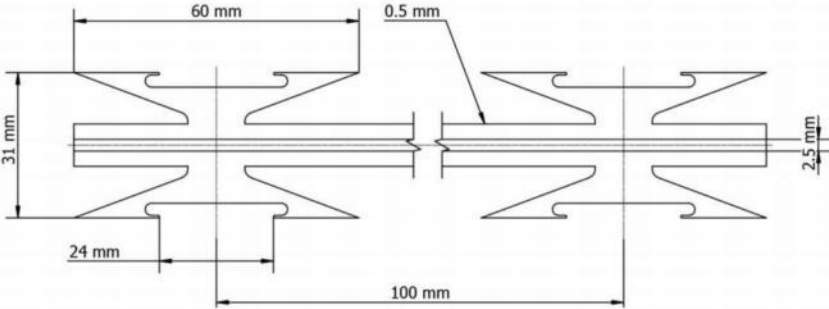

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
CBT-60	0.5±0.05	60.0±2	31±1	100±2	2.5±0.1

- Core wire material: galvanized steel wires or stainless steel wires.
- Blade material: galvanized steel sheets or stainless steel sheets.
- Other materials and sizes can be customized upon request.

Specification of Fish-Hook Blade Concertina Wire Rolls

Outer Diameter (mm)	Coil Loops	Clips	Extended Length (mm)	Blade Type
300	33	3	4	CBT-60
450	55	3	10	CBT-60
730	55	5	10-12	CBT-60
730	55	3	15-20	CBT-60
980	55	5	10-15	CBT-60
980	55	7	8	CBT-60
1250	55	9	8	CBT-60



MILITARY/BORDER SECURITY

BTC Barbed Tape Concertina

BTC barbed Tape Concertinas are manufactured in strict accordance with U.S military specification MIL-AA-55522A with optional BTO-10 and BTO-22 blade types.

Barbed tape concertina complies with ASTM A653 standard and the barbed tape shall be fabricated from G90 galvanized steel sheets and permanently wrap about the galvanized core wire with a minimum of 230°.

Adjacent barbed tape concertina coils are connected with 3 or 5 galvanized clips for fixing. Galvanized clips shall be 1.7 mm thickness × 9.5 mm width × 25 mm length and can withstand a minimum of 24 kg tensile load.

Barbed tape concertinas are mainly used in military field and military training barrier applications.

Benefits

- ASTM A653 compliance hot dip galvanized G90 coating.
- Hot dip galvanized steel material offers great corrosion resistance and weather resistance.
- In addition to standard galvanized steel, stainless steel and aluminized zinc steel materials are also available upon request.
- Comply with U.S military specification MIL-A-A-55522A.
- Economic and practical, can be installed quickly.

Application

BTC barbed tape concertinas are widely used in border security protection applications, military bases and military training barriers.



For border security protection



For military training barriers



For military base obstacles



For border security protection



Packing & Shipping

Packed in cartons or bound to a wood pallet with steel strips.




Carton package




Wood pallet package

Specification of BTC Barbed Tape Concertinas

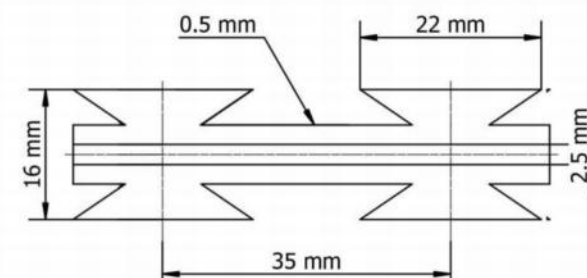

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-10	0.5±0.05	10±1	13±1	25±1	2.5±0.1

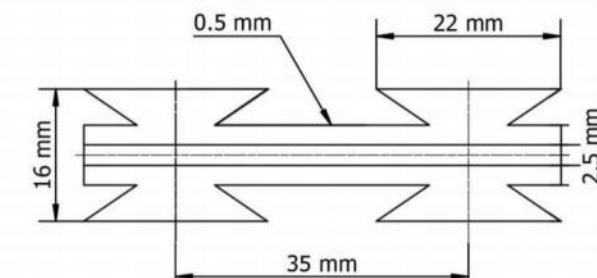

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-22	0.5±0.05	22±1	16±1	35±1	2.5±0.1

Specification of BTC Barbed Tape Concertina Rolls

Outer Diameter (mm)	Coil Loops	Clips	Loop Spacing (mm)	Extended Length (m)	Blade Type
450	56	3	406	11	BTO-10, BTO-22
720	56	3	533	15	BTO-10, BTO-22
900	50	5	600	15	BTO-10, BTO-22
965	56	5	533	15	BTO-10, BTO-22
1000	56	5	533	15	BTO-10, BTO-22





BTC NATO-22 Barbed Tape

BTC NATO-22 barbed tape is specially developed to meet NATO military requirements. It offers a larger/wider barb than that of BTO-series blades. In addition, the NATO-22 barb is available offset, which greatly increases the coil density and the psychological deterrence. It is more economic than that of CBT-series blades.

BTC NATO-22 barbed tapes are made of high quality, high tensile stainless steel or galvanized steel to offer great corrosion resistance and deliver a service life ranging from 10 to 40 years. It is your ideal choice for military purposes and border defense applications.

Benefits

- Barb length and spacing are designed to meet NATO specifications.
- Excellent security performance.
- Available in offset barb which greatly increases barb effectiveness, coil density, and psychological deterrence.
- It enjoys a service life of 10 to 40 years.

Application

BTC NATO-22 barbed tapes are widely used in a wide range of military applications.



Packing & Shipping

- Waterproof paper inside and plastic woven bag outside;
- Wood pallet;
- Bare package.



Waterproof paper & woven bag package




Wood pallet



Bare package

Specification of BTC NATO-22 Barbed Tapes

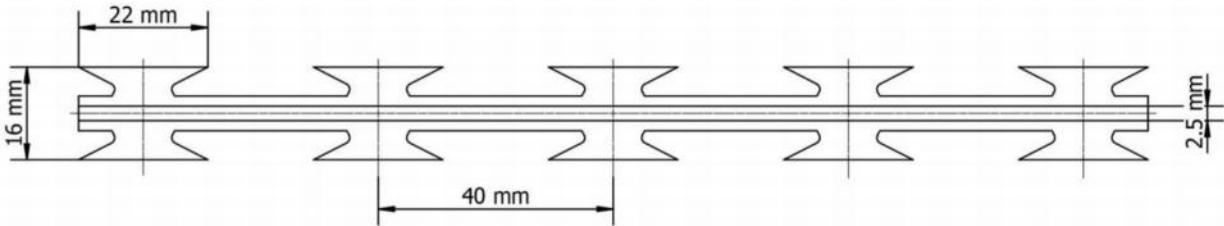

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
NATO-22	0.5	22	16	40	2.5

Specification of BTC NATO-22 Barbed Tape Rolls

Outer Diameter (mm)	Coil Loops	Clips	Loop Spacing (mm)	Extended Length (m)	Blade Type
450	56	3	406	11	BTC NATO-22
600	56	3	406	11	BTC NATO-22
720	56	3	533	15	BTC NATO-22
750	56	5	533	15	BTC NATO-22
900	56	5	533	15	BTC NATO-22
980	56	5 (7)	533 (150)	15 (4.3)	BTC NATO-22
1000	56	5	533	15	BTC NATO-22



ENHANCED SECURITY

WELDED Razor Mesh

Welded razor mesh, also known as razor mesh panel, is a versatile, high security fencing mesh made of cross-welded straight razor wires and is designed to protect you and your property without marring the appearance of the property.

Welded razor mesh often is available in both hot-dip galvanized and powder coated surfaces with the purpose of offering better corrosion resistance, enhanced aesthetic appearance and higher cost-effectiveness.

There are 3 types of mesh openings: diamond, square and rectangular. It can be used directly or welded with frames. Welded razor mesh is provided with sharp blades, you can neither hold nor climb over it, therefore, it is a perfect protective barrier for preventing illegal intruders and offering great security protection effect.

Welded razor mesh is widely used in the back fence lines of properties, around vacant land, on precast walls and around industrial areas to add more security.

Benefits

- No climbing
- Firm structure
- Anti-shear
- Galvanized and powder coated surface provides excellent corrosion resistance
- Neat and clean appearance
- Diamond, square and rectangular mesh opening types for your option.
- Easy to install and can be installed individually or added to existing fences or walls.
- Strong visual and psychological deterrence.
- Great physical barrier.

Application

Welded razor mesh is widely used in prisons, detention houses, drug rehabilitation centers, military bases, residential communities, factories, private houses, government agencies, bank windows and doors, along highways or railways, etc.



For prison isolation



For highway protection




For private house security protection



For factory security protection

Packing

Available in both roll package and pallet package.




Roll package




Pallet package


Mesh Opening Types



Diamond opening





Square opening



Rectangular opening

Specification

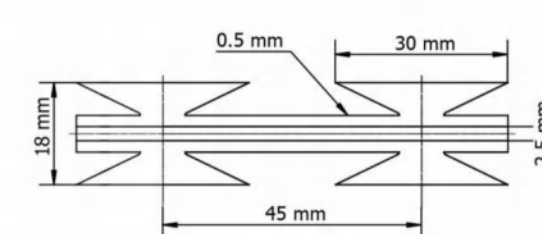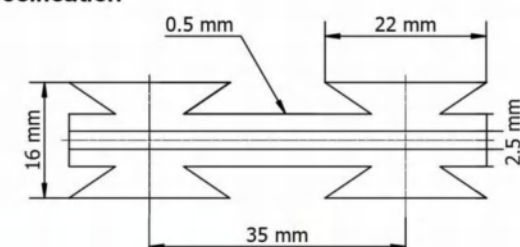

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-22	0.5±0.05	22±1	16±1	35±1	2.5±0.1

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-30	0.5±0.05	30±1	18±1	45±1	2.5±0.1

Specification of Welded Razor Mesh Panels

Height (m)	Length (m)	Aperture Size (mm)	Blade Type
1.2	3-6	75 × 150, 150 × 300, 100 × 150, 100 × 100, 40 × 40, 50 × 50, 60 × 60, 70 × 70, 80 × 80, 90 × 90	BTO-22, BTO-30
1.8	3-6	75 × 150, 150 × 300, 100 × 150, 100 × 100, 40 × 40, 50 × 50, 60 × 60, 70 × 70, 80 × 80, 90 × 90	BTO-22, BTO-30
2.1	3-6	75 × 150, 150 × 300, 100 × 150, 100 × 100, 40 × 40, 50 × 50, 60 × 60, 70 × 70, 80 × 80, 90 × 90	BTO-22, BTO-30
2.4	3-6	75 × 150, 150 × 300, 100 × 150, 100 × 100, 40 × 40, 50 × 50, 60 × 60, 70 × 70, 80 × 80, 90 × 90	BTO-22, BTO-30
3.0	3-6	75 × 150, 150 × 300, 100 × 150, 100 × 100, 40 × 40, 50 × 50, 60 × 60, 70 × 70, 80 × 80, 90 × 90	BTO-22, BTO-30

Specification of Welded Razor Mesh Rolls

Height (m)	Length (m)	Aperture Size (mm)	Blade Type
1.2	20	75 × 150, 150 × 300, 100 × 150, 100 × 100, 40 × 40, 50 × 50, 60 × 60, 70 × 70, 80 × 80, 90 × 90	BTO-22, BTO-30
1.8	20	75 × 150, 150 × 300, 100 × 150, 100 × 100, 40 × 40, 50 × 50, 60 × 60, 70 × 70, 80 × 80, 90 × 90	BTO-22, BTO-30
2.1	20	75 × 150, 150 × 300, 100 × 150, 100 × 100, 40 × 40, 50 × 50, 60 × 60, 70 × 70, 80 × 80, 90 × 90	BTO-22, BTO-30
2.4	20	75 × 150, 150 × 300, 100 × 150, 100 × 100, 40 × 40, 50 × 50, 60 × 60, 70 × 70, 80 × 80, 90 × 90	BTO-22, BTO-30
3.0	20	75 × 150, 150 × 300, 100 × 150, 100 × 100, 40 × 40, 50 × 50, 60 × 60, 70 × 70, 80 × 80, 90 × 90	BTO-22, BTO-30

- Core wire material: galvanized steel wires or stainless steel wires.
- Blade material: galvanized steel sheets or stainless steel sheets.
- Mesh opening shapes, sizes, blade types and surface treatments are customized upon request.



FLAT WRAP

Flat Wrap Razor Wire

Flat wrap razor wire is a new type of razor wire fabricated by single coil razor wire that is flattened and then clipped to wires to create flat sheets. It unfolds into a flat structure that stays within the overall dimensions of the fence, offering a more compact design and solving the problem of spiral concertina wire hanging out of the boundary to make it a perfect choice for applications within limited space.

Flat wrap razor wire is commonly used to upgrade the security of residential fences, precast concrete walls, chain link fences, perimeter fences and gates. This combination offers a high security barrier and is designed to deter and prevent illegal intruders while delivering a neat, attractive appearance.

Benefits

- No razor wires are draped and no innocent people are hurt.
- Your ideal choice for security protection in limited space.
- Easy installation, you can start your installation directly after unfolding the product.
- It can be flexibly combined with fences, gates and walls.
- Little or no maintenance.

Application

Flat wrap razor wire can be used as a vertical anti-climb deterrent for almost all types of fences, fence gates, walls and roof windows. When being secured to the top of a fence, it offers an enhanced deterrent for places where high security protection is required.



At the top of 358 high security fence



At the top of fence gate



At the upper part of palisade fencing



At the top and bottom of sliding door

Packing & Shipping

- Flat wrap razor wires are packed with waterproof paper inside and woven bag outside.
- Flat wrap razor wire is bundled and wrapped with 5 coils, and each coil is 15 meters long.



Waterproof paper package




Woven bag package




Shipping

Specification of Flat Wrap Razor Wires

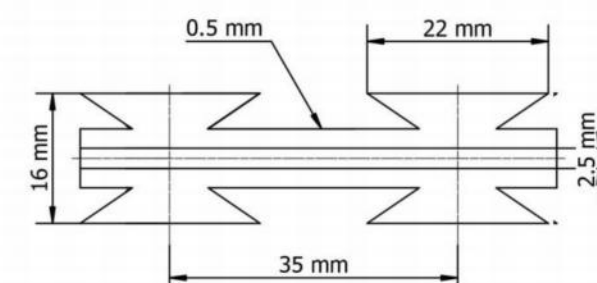

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-10	0.5±0.05	10±1	13±1	25±1	2.5±0.1

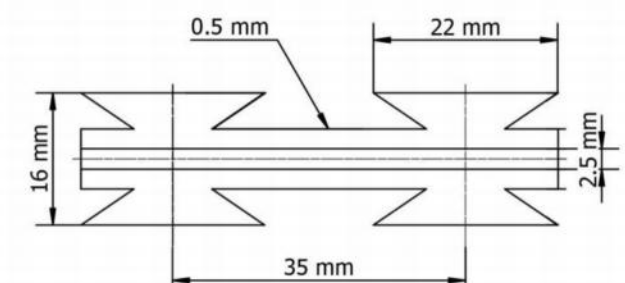

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-22	0.5±0.05	22±1	16±1	35±1	2.5±0.1

Specification of Flat Wrap Razor Wire Rolls

Height (mm)	Extended Length (m)	Blade Type
500	15	BTO-10, BTO-22;
700	15	BTO-10, BTO-22;
900	15	BTO-10, BTO-22;

- Core wire material: Galvanized steel or stainless steel wires.
- Blade material: Galvanized steel, stainless steel or aluminized zinc steel sheets.
- Blade types and surface treatments are customized upon request.



RAZOR WIRE MOBILE SECURITY BARRIER

Razor wire mobile security barrier is composed of concertina wires and support frames on both ends. One-end frame can be operated to complete concertina wire deployment and recovery in a few minutes. The retractable concertina wire and the support frame are integrated and firmly connected, offering a firm, stable overall structure.

It is suitable for isolation, traffic interruption and area containment control in special occasions to maintain public order and ensure public security. In addition, it is also required when the military and police need to effectively isolate the scene of illegal and criminal activities, block traffic and block the area to achieve full area isolation during the work of maintaining stability and dealing with emergencies. As it can not only effectively prevent crowds from colliding, climbing and leaping, but also prevent vehicles from forcibly braking through the blockade, therefore, it is widely used for target protection, border defense against enemy forces, riot control, mass protest and riot control, accident scene obstacle deployment, road construction obstacle deployment and other emergencies.

Razor wire mobile security barrier is mainly divided into single strand security barrier and triple strand security barrier by number of concertina wire rolls.

Single Strand Security Barrier

Single strand security barrier consists of a retractable concertina wire unit and a support frame. The concertina wire unit has a contracting diameter ranging from 80 cm to 100 cm and a stretching length of 10 m. At the bottom of the support frame, 4 retractable castors are provided for easy pushing and moving. In collapse conditions, it is easy to push and move forward. In addition, a canvas cover is provided to cover the support frame for easy transportation, storage, handling and loading.

It is generally used to isolate and interrupt traffic, maintain public order and ensure public security, etc.

According to the outer package, it can be divided into the following types.



Standard type

Contracting diameter: 1000 mm
Height: 1100 mm
Width: 550 mm
Stretching length: 7-10 m
Blade type: BTO-22



Roller type

Contracting diameter: 900 mm
Height: 850 mm
Width: 865 mm
Stretching length: 10 m
Blade type: BTO-22

Triple Strand Security Barrier

Triple strand security barrier is an upgrade of single strand security barrier. It consists of 3 retractable concertina wire units and an integrated support frame. Each concertina wire unit has a diameter ranging from 80 cm to 100 cm and an extendable length of 10 m. The support frame is provided with a catching door that can be opened and retracted for quick deployment. In addition, the integrated support frame can perfectly accommodate 3 concertina wire units for easy handling and storage while offering a firm, stable overall structure.


The triple strand security barrier is reusable and retractable. The barrier height is about the sum of the diameter of 2 concertina wire units. It has strong anti-overturning and anti-damaging capacity and is not easy to climb, overturn and damage under normal circumstances. Multiple triple strand security barriers can be used in any combination according to the actual length required to perform deployment tasks for roads of different length.

Benefits

- Can be deployed on flat roads, uneven roads, slopes, small obstacles and other terrains;
- Easy and quick deployment.
- Can be used flexibly, in single or multiple units in any combination.
- Great isolation effect makes it is hard to climb.
- Firm, good elasticity and not easy to deform.
- Reusable and easy to store and transport.

Application

It is widely used in military facilities, airports, warehouses, prisons, enterprises, institutions, border guards, riot prevention, border quick isolation, etc.

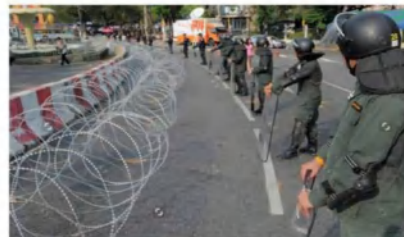

For public area isolation




For traffic interruption



For border isolation



For emergency isolation

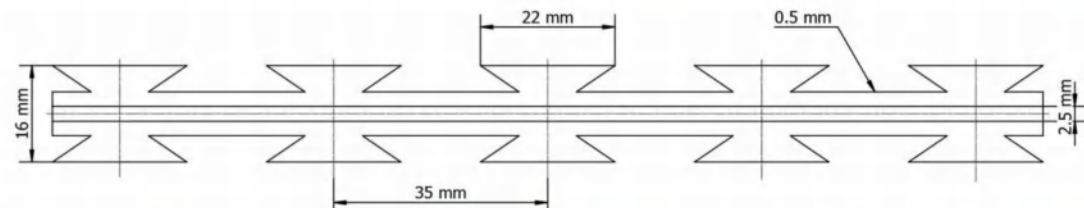

Specification

Contracting diameter: 1530 mm
Height: 1530 mm
Width: 730 mm
Stretching length: 10 m
Blade type: BTO-22

Blade Type	Barb Thickness (mm)	Barb Length (mm)	Barb Width (mm)	Barb Spacing (mm)	Core Wire Diameter (mm)
BTO-22	0.5±0.05	22±1	16±1	35±1	2.5±0.1

• Other blade styles are available upon request.



Gloves
Gloves for hand and wrist protection, which are cut, puncture and abrasion resistant. They are specifically designed for handling barbed tape products. Sleeves for lower and upper arm protection are also required for further protection



Hog ring pliers
Used to compress hog rings in fence anchored installations.



Anchorage
Required to anchor ground based installations, usually positioned at 10 feet intervals.



Wire ties
Twistable ties are used to secure the barbed tape at the tie point in anchoring installations.



Arm Sleeve Guard
Used to protect the installer, the arm/sleeve guard covers from the wrist to the shoulder.



Wire tie twist tool
Used to twist wire ties in fence anchored installations.



Y Support
Used to install razor wires and commonly installed on walls to support razor wires.



Hog rings
Hog rings for connecting the razor wire to the fence in the fence anchored installations.




Expansion screws & gaskets
Used to fix razor wires onto walls when installing razor wires.


DEFENSIVE BARRIERS PRODUCT OVERVIEW

DEFENSIVE BARRIERS are regarded as the most significant development in field fortifications since the second World War. They are effective and economical structures to protect safe of soldiers, vehicles, equipment and facilities in military sites, peacekeeping, humanitarian and civilian operations.

Defensive barriers are strong structures which are composed of welded gabions and non-woven polypropylene geotextile. According to different use environments, the defensive barriers can be made into standard and recoverable types for your choice.

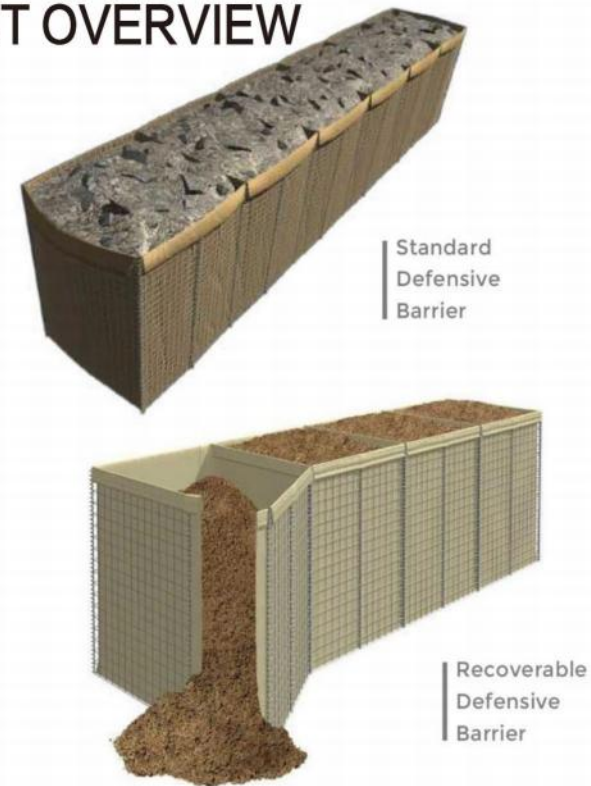

- **Material:** hot-dipped galvanized steel wire or zinc-aluminum alloy steel wires.
- **Wire diameter:** 4 mm or 5 mm.
- **Mesh size:** 50 × 50 mm, 75 × 75 mm, 76.2 × 76.2 mm, 50 × 100 mm, 100 × 100 mm, ect.
- **Geotextile:** 2 mm heavy duty non-woven polypropylene.
- **Geotextile color:** White, beige, Military Green and other customized colors.

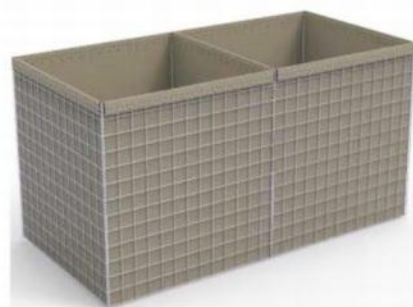

Beige (Most Popular)



Military Green




White


MAIN STRUCTURES

The Defensive barriers are available in various specifications and configurations for complex environments. Here are standard and popular types and specifications in the following.


DB 1

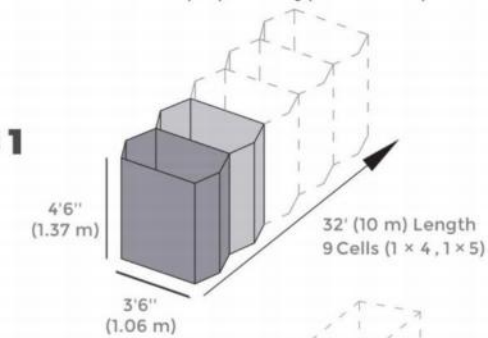


DB 2

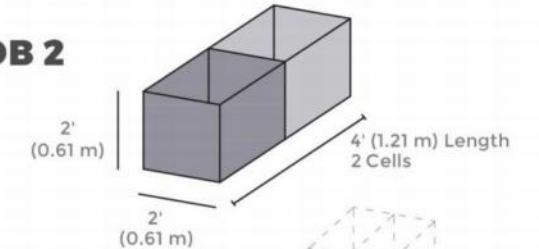


DB 3

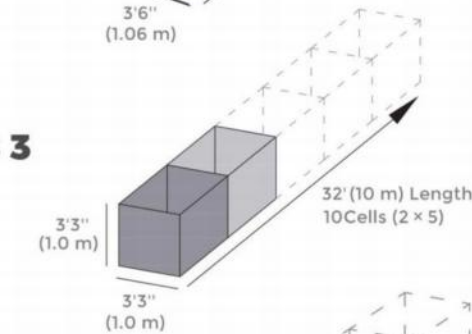


DB 4

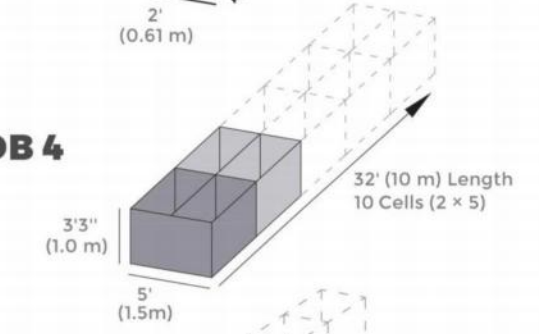


DB 5

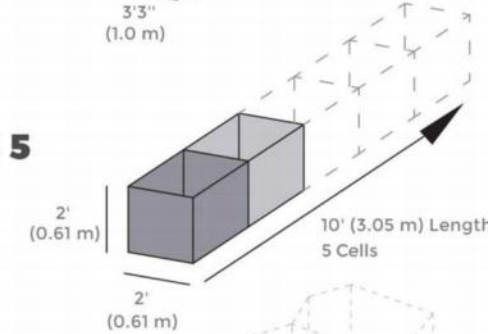


DB 6

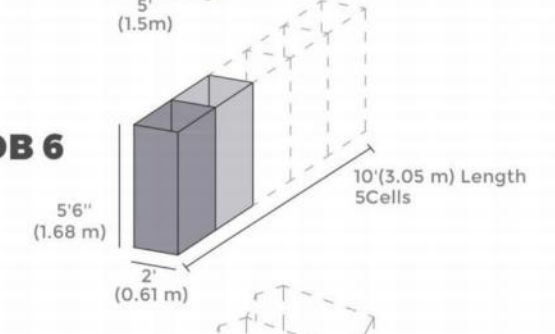


DB 7

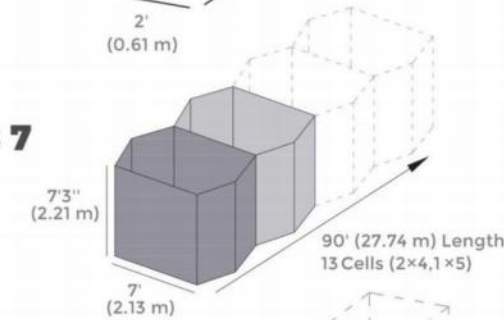


DB 8

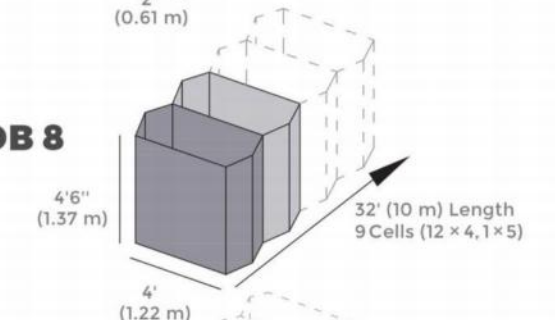


DB 9

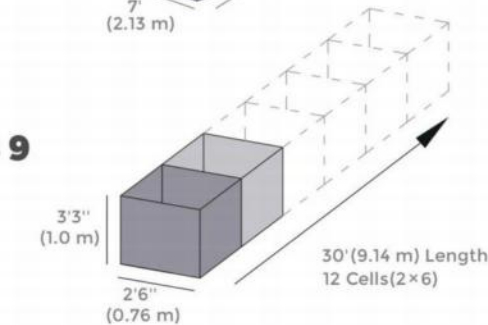

DB 10

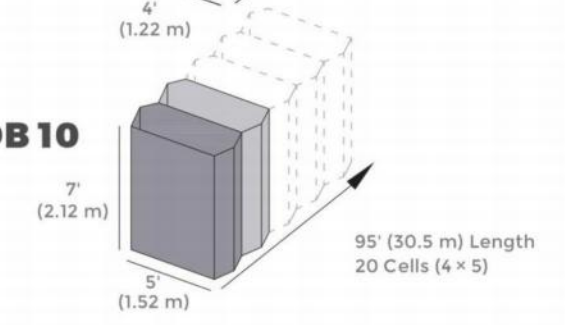

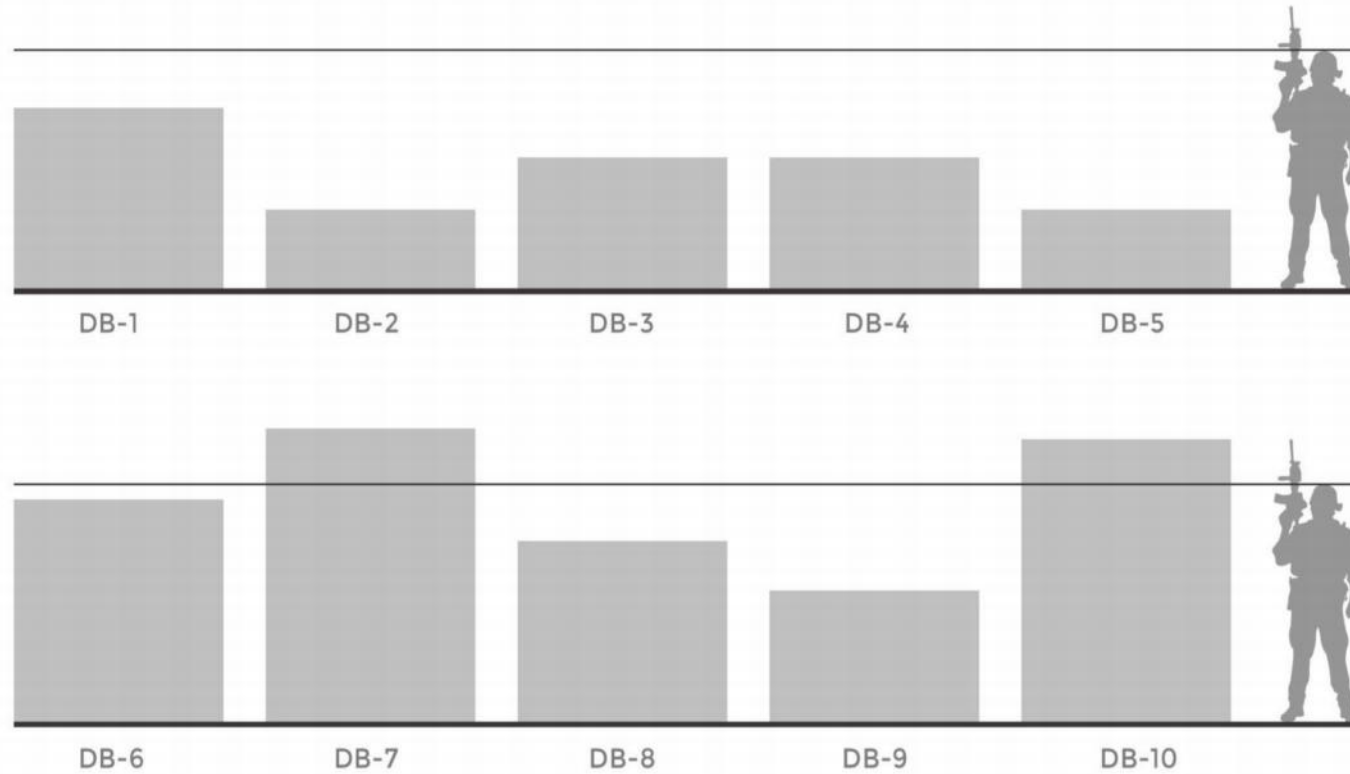

COMMON SPECS OF DEFENSIVE BARRIERS

Item	Height		Width		Length		Cell
	inch	m	inch	m	inch	m	
DB-1	4'6"	1.37	3'6"	1.06	32'	10	9 (1 × 4, 1 × 5)
DB-2	2'	0.61	2'	0.61	4'	1.21	2
DB-3	3'3"	1	3'3"	1	32'	10	10 (2 × 5)
DB-4	3'3"	1	5'	1.5	32'	10	10 (2 × 5)
DB-5	2'	0.61	2'	0.61	10'	3.05	5
DB-6	5'6"	1.68	2'	0.61	10'	3.05	5
DB-7	7'3"	2.21	7'	2.13	90'	27.74	13 (2 × 4, 1 × 5)
DB-8	4'6"	1.37	4'	1.22	32'	10	9 (1 × 4, 1 × 5)
DB-9	3'3"	1	2'6"	0.76	30'	9.14	12 (2 × 6)
DB-10	7'	2.13	5'	1.52	95'	30.5	20 (4 × 5)

STANDARDIZED & SKILLED PRODUCTION

- **All Raw materials conform to international standards.**
 - All wires Wire tensile strength conforms to **BS 1052**.
 - Galvanized wire coating conforms to **ASTM A 641** and **EN 10244-2**.
 - Zinc-aluminum alloy wire coating conforms to **ASTM A 856**.
 - Geotextile conforms to **ISO 10319**.
- **Advanced equipment ensures accurate welding and specifications.**
- **Skilled workers reduce production loss and ensure timely delivery.**



High Quality Raw material for durable life



Solid welds and smooth panel for safe and convenient use



High strength, penetration resistance geotextile



Skilled workers for fast assembly and timely delivery



Spring Wire Test



Welded Wire Test




Mesh Aperture Test




Overall Length Test

ASSEMBLY GUIDANCE

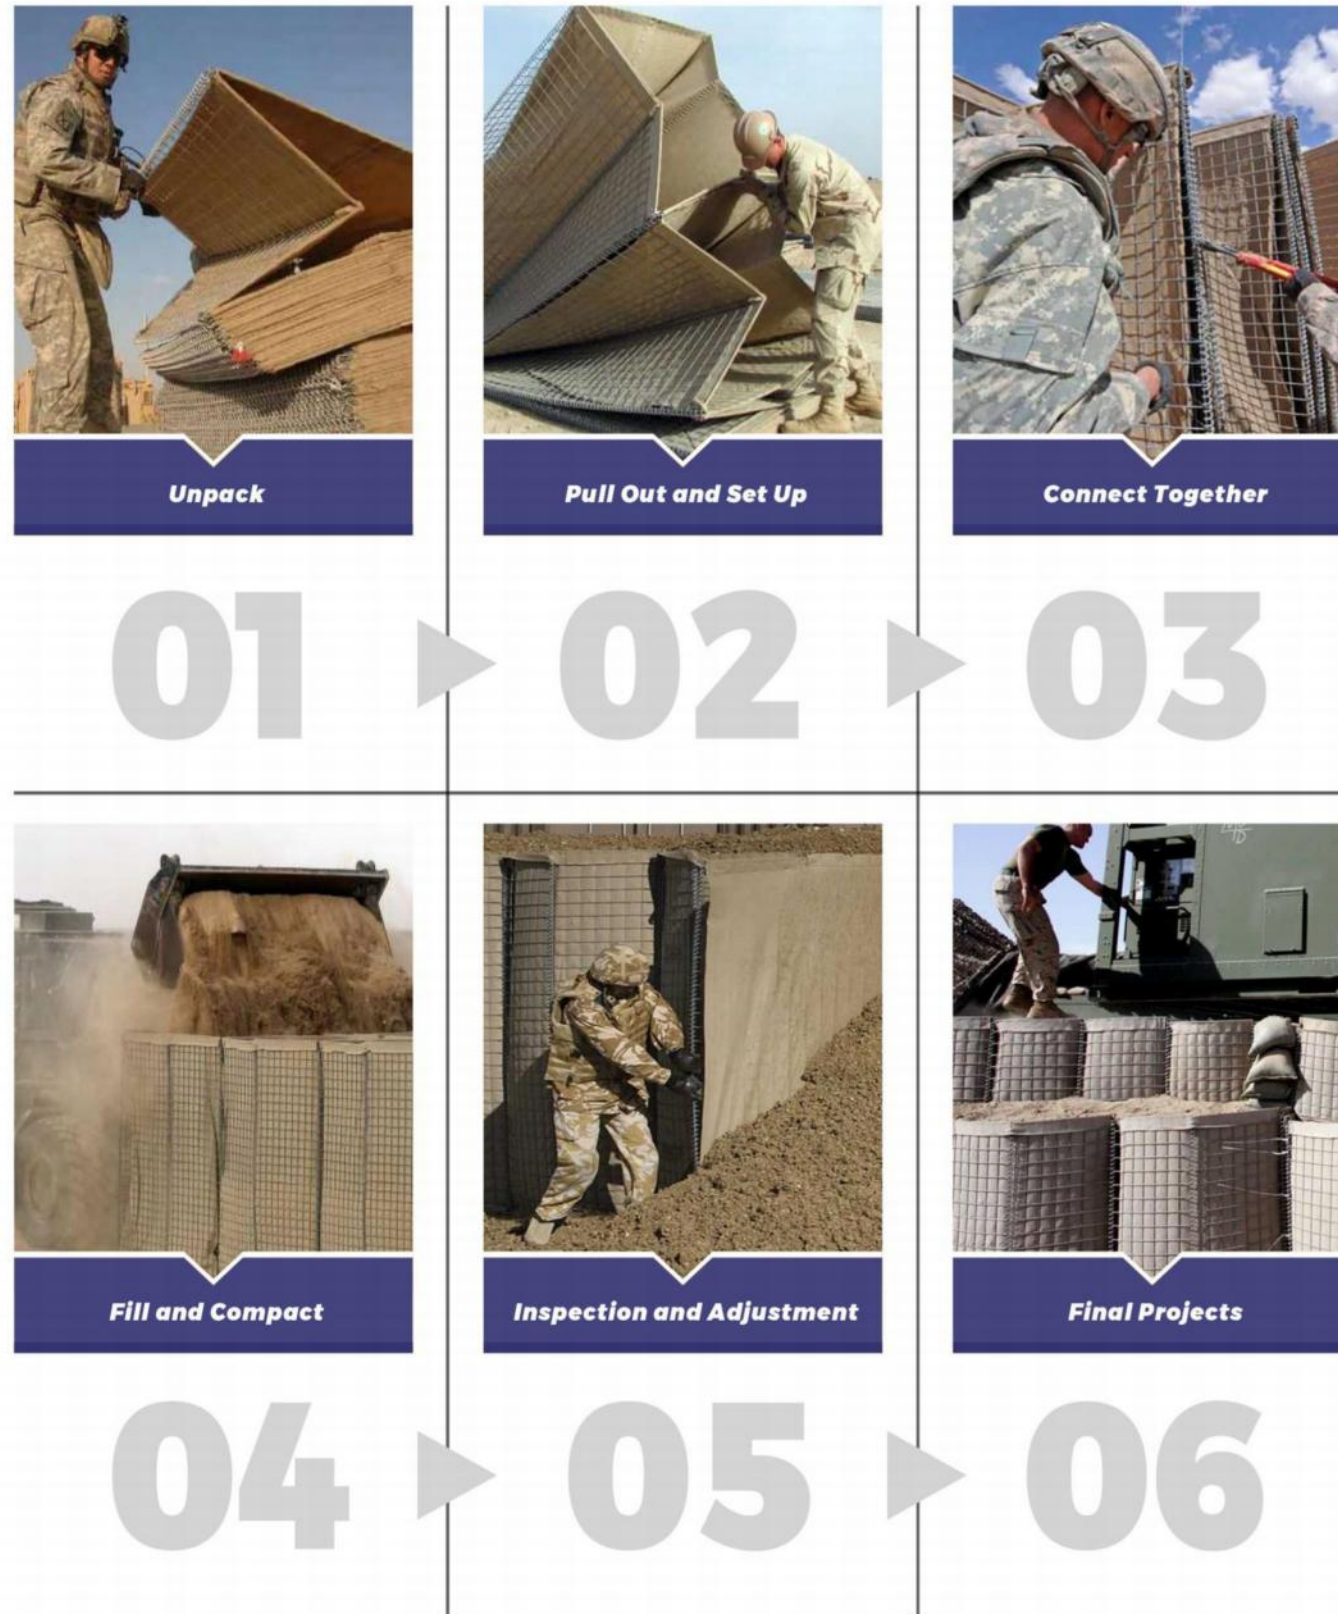

APPLICATIONS

- Ammo compounds
- Noise abatement barriers
- Sentry towers
- Guard posts, both improvised and in kit form
- Vehicle barriers
- Entry Control Points
- Blast mitigation walls
- Cover from view
- Protection from ballistics
- Protection for aircraft (revetments)
- Protection of adjacent occupants from the accidental discharge of aircraft weapons
- Protection of living accommodations
- Provision of bomb shelters
- Asset protection

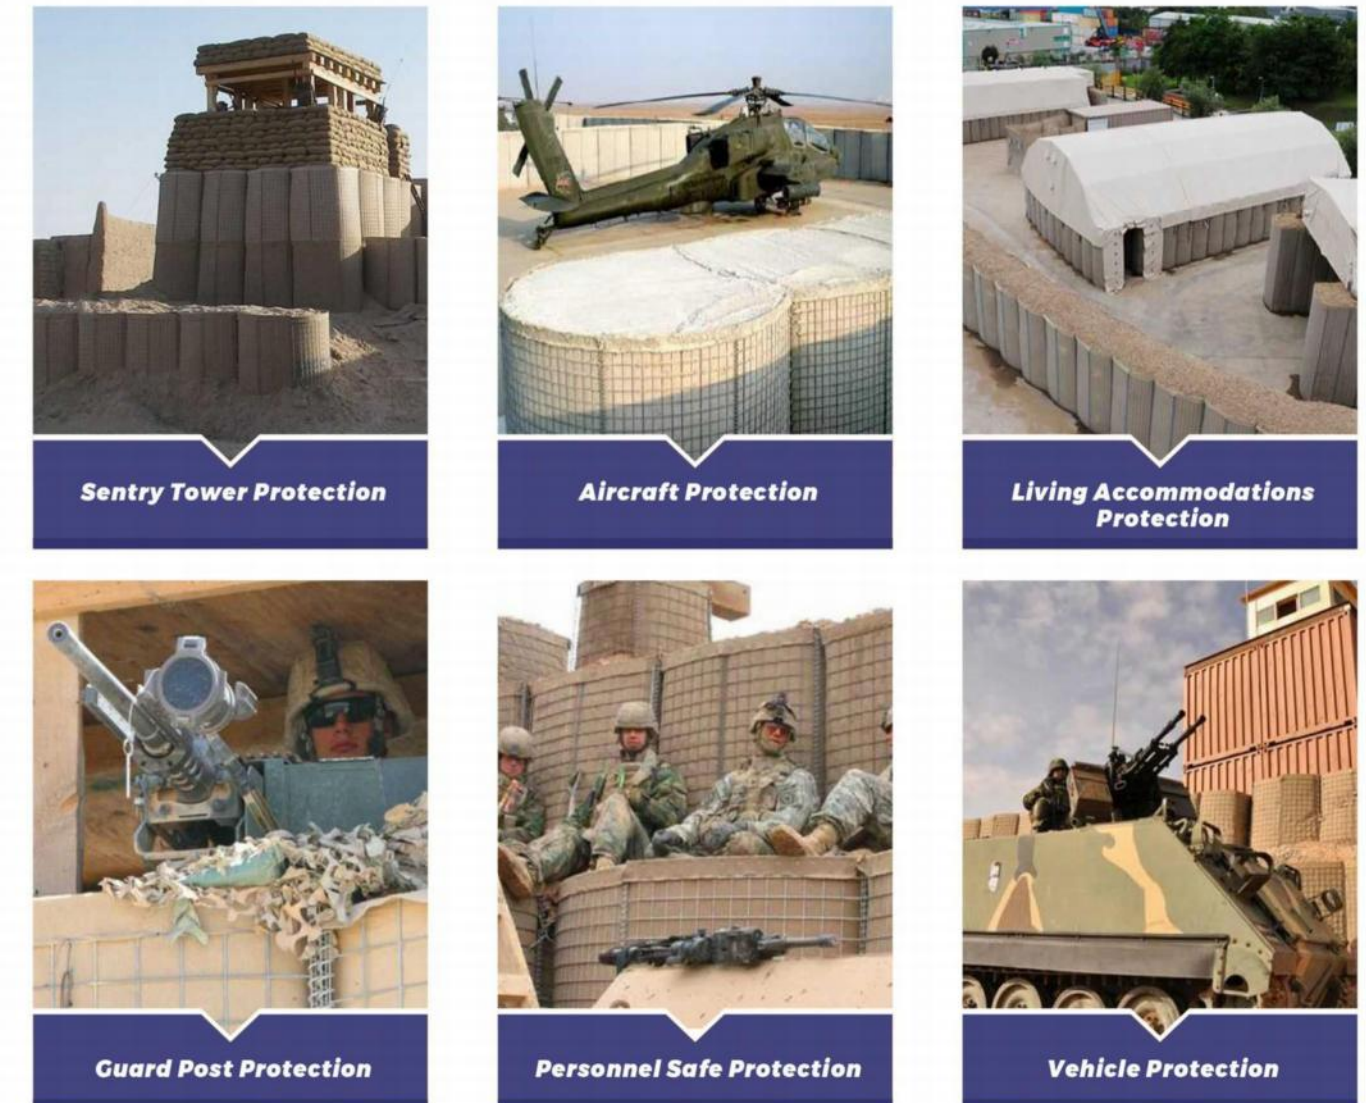

PROJECTS REFERENCE LIST

Project Information	Overview	
Cango Military 2,000 Line Meters Defense Barrier		
Iraq Military 3,000 Line Meters Defense Barrier		
Australia Private Construction 280 Units Safety Gabion Wall		
France Port Construction 1000 Unit Gabion Retaining Wall		
USA Landscape Construction 1000 Units Gabion planters		
Indonesia Coastal Protection 3500 Line Meter Flood Barrier		





Razor Wire Trailer

A Razor Wire Trailer is a special purpose vehicle used for rapidly deploying temporary barricades. It is widely applied in riot control, stability maintenance, border control, battlefield defense, and emergency response scenarios. Its core function is to quickly unfurl barbed tape (with blades or spikes) to form a physical barrier, effectively preventing unauthorized passage of people or vehicles.

Main Types and Features

1. Razor Barbed Tape Barrier Vehicle

Uses high strength hot dip galvanized or 304 stainless steel razor barbed tape, which is extremely sharp and highly deterrent.

Can deploy a 100 meter barrier in 19 – 20 seconds and retrieve it within 4 minutes.

The barrier is typically arranged in a triangular (pyramid like) pattern, about 1.7 meters high, with an unfolded length of 90 – 100 meters. It is often described as “a protective wall without bullets.”

2. Barbed Wire Barrier Vehicle

Uses barbed wire made of multiple steel strands twisted with spikes – more adaptable to rough terrain, with fast deployment speed.

Suitable for long distance, large area cordoning , such as border lines or perimeter security on battlefields.

3. Steel Panel Barrier Vehicle

Uses welded steel panels or steel mesh units – very stable, suitable for intersections, checkpoints or other areas requiring strong blocking.

Combines protection strength with visibility, and can be easily linked with vehicles and roadblocks.



Barbed Wire

Barbed wire is a rope like product twisted by a fully automatic barbed wire machine. Commonly known as iron caltrops, barbed wire, or barbed string. Finished product types include single wire twist, double wire twist, and reverse twist barbed wire.

Raw Materials

Mainly low carbon steel wire (e.g., Q195 or Q235). Also available in galvanized steel wire, stainless steel wire (e.g., 304 or 316), PVC coated steel wire, or high carbon steel wire. The barbed part can be made of stainless steel blades or alloy blades.


Surface Treatment

Electro galvanizing, hot dip galvanizing, plastic coating, spray coating, PVC coating, aluminum coating, etc. Available in colors such as blue, green, yellow, and others.

Applications

Barbed wire is extensively applied in security, military, prison, and border protection fields. Its main uses include boundary fencing for grasslands, railways, and highways. It is also used for anti theft and protection in factories, private villas, residential areas, construction sites, banks, prisons, banknote printing plants, military bases, airports, sports fields, as well as high security scenarios such as borders, military restricted zones, prisons, and other high strength security fences.

Other uses include underground roadway support in coal mines, isolation fencing for ranches and farms, enclosure protection for garden apartments, etc. Additionally, barbed wire is used for enclosure and protection in industry, agriculture, animal husbandry, forest protection, garden apartments, government offices, outposts, border defense, and more.

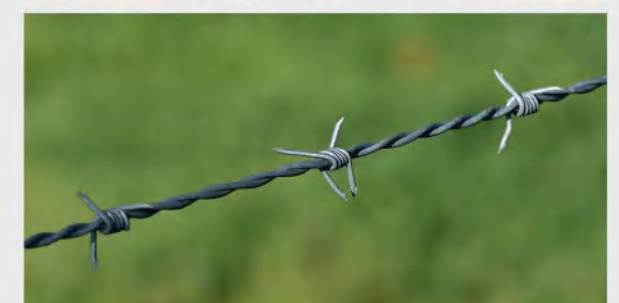

Temporary Protective Fencing

Border Boundary Fence

The border boundary fence is a critically important security barrier in our country. It is composed of welded steel mesh combined with concertina razor barbed tape. The product features a novel structure, robust and tight construction, a smooth mesh surface, uniform mesh openings, sharp blades, anti-climb properties, and strong corrosion resistance. Installed on the inner and outer walls as well as on top of high walls of prisons, the concertina razor barbed tape is added to the inner side or the top of the mesh wall, forming an unclimbable, insurmountable isolation barrier. Together with high-voltage electric fences and various monitoring and alarm devices, it ensures complete prison security.

The fence assembly consists of V-shaped support posts, reinforced welded mesh panels, security anti-theft connectors, and concertina razor barbed tape. A V-shaped bend is welded to the top of each post—such posts are also called Y-shaped posts—used to mount the concertina razor barbed tape. This perfectly integrates with the prison isolation fence below, forming an impregnable "wall of iron and bronze."



Also known as mobile fencing or temporary barrier fencing, this type of movable safety fence is highly flexible and suitable for temporary separation, blocking, and enclosure applications.


Surface Treatment:

Supports various surface treatment options such as hot-dip galvanizing, plastic dipping, PVC coating, and baking finish to enhance corrosion resistance and long-term durability.

Application Scenarios:

Urban Stability Maintenance: Quickly forms a physical barrier to effectively separate and block protesters or rioters, preventing attacks on key targets. It assists security forces in maintaining order and allows flexible adjustment of the isolation area.

Military Isolation: Used to demarcate military restricted zones and temporary alert lines, preventing unauthorized personnel and vehicles from entering, ensuring facility security and confidentiality. It facilitates rapid deployment and withdrawal, adapting to field exercises or combat readiness needs.

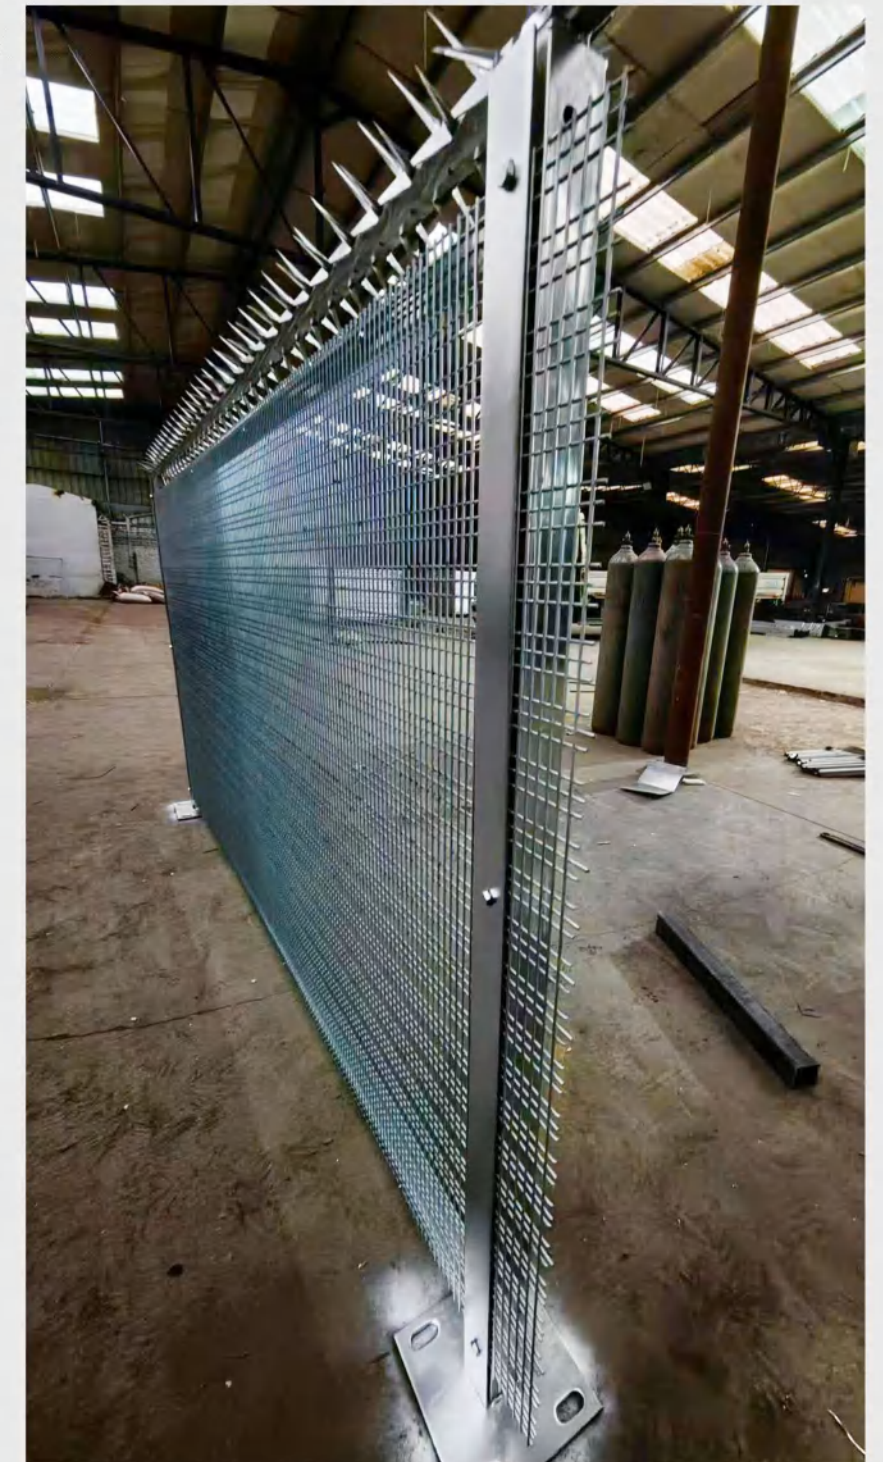



Anti Drone Net

Anti drone net is a physical defense measure that primarily uses a solid mesh structure to intercept, entangle, or block drones, preventing them from approaching or attacking protected targets. It is widely used in scenarios such as military bases, critical infrastructure, and large event security.

Technical Features and Specifications

The design of physical protection nets focuses on material performance, structural stability, and environmental adaptability to counter drones of different threat levels.

Material and Design

Material: Specially made soft nylon or polyethylene materials are used, offering excellent abrasion resistance and the ability to withstand extreme temperatures (e.g., from -40°C to 60°C), ensuring elasticity and strength even in harsh weather conditions.

Dimensions: Common specifications include 30 meters in length and 6 meters in width, with a mesh size of approximately $5\text{ cm} \times 5\text{ cm}$ and a wire diameter of about 0.2 mm . This design effectively entangles drone propellers while keeping the net lightweight to reduce wind resistance.

Structure: Modular design with special connectors for fast installation, easy maintenance, and replacement of damaged sections. Some systems incorporate support poles (e.g., composite material uprights) to form a "tunnel" or "shed type" structure covering areas such as roadways or hangars.



Anti-Tank Wire Mesh

Anti-tank wire mesh is a barrier net used to prevent the advance of tanks. It incapacitates a tank by entangling the drive shafts of its tracks. In addition to military applications, it can also be used in civilian fields such as marine aquaculture and livestock enclosure.

For Military Defense

Primarily used on the battlefield to counter the advance of tanks and other armored vehicles. By entangling tank tracks with dense wire mesh, it increases rolling resistance, prevents or delays the tank's advance, and buys time for the defending side to organize counterattacks, adjust tactics, or retreat. Tank nets with sharp barbs or blades can severely wear down or damage tank tracks, reducing mobility or even disabling the tank. They are often combined with other defensive fortifications such as minefields and trenches to form multi-layer defense systems, enhancing overall defensive effectiveness. Their presence also serves as a psychological deterrent against enemy armored forces, demonstrating the defender's capability to resist and counterattack. Additionally, they can be used together with camouflage nets to increase the concealment and practical effectiveness of defensive works.

For Tank Protection

Used to protect tanks from anti-tank weapons carried by enemy infantry (such as rocket-propelled grenades, magnetic anti-tank mines, etc.). The net can cause these weapons' triggering mechanisms to activate prematurely, thereby reducing the threat to the tank.





JIZHUANG

冀壮科技

Hebei Jizhuang Technology Co., Ltd.

Email: admin@jzwiremesh.com

www.jzwiremesh.com

Tel : 19134101551

Address: Room 1812, Unit 01, China Resources MixC, No. 108 Zhongshan West Road, Qiaoxi District, Shijiazhuang City, Hebei Province, China